

	<u>Sun2earth solar</u>	Doc. No.	Draft
		Doc. Date:	--
		Rev. No.	00
		Rev. Date:	
<u>CONSTRUCTIONAL DATA FORM FOR PHOTOVOTAIC MODULES 165 Watt</u>		Page 1 of 2	



Technical specifications of module

<u>Type Family</u>				
Pmax (W)	Voc (V)	Isc (A)	Vmp (V)	Imp (A)
165 (24V)	42.79	4.68	36.78	4.49
<u>Type Family</u>				
Pmax (W)	Voc (V)	Isc (A)	Vmp (V)	Imp (A)
165 (12V)	21.40	9.36	18.39	8.98

Type Of Series	TopCon Cut Cells 165W
Total Number of Cells:	60
Cell Matrix:	15 X 4
Max System Voltage (V):	600
Application Class:	A
Protection Calss:	II
Module Dimensions (mmXmmXmm):	990X765X35
Module Area (sqm):	0.757
Module Efficiency (%):	>19
Current temperature coefficient α [%/°C]	+0.040
Voltage temperature coefficient β [%/°C]	-0.26
Power temperature coefficient δ [%/°C]	-0.34
NOCT [°C]	42 +/- 2

Prepared By	Approved By
Chandrama	Bhavesh Patel

	<u>Sun2earth solar</u>	Doc. No.	Draft
		Doc. Date:	--
		Rev. No.	00
	<u>CONSTRUCTIONAL DATA FORM FOR PHOTOVOTAIC MODULES 165 Watt</u>	Rev. Date:	
Page 2 of 2			

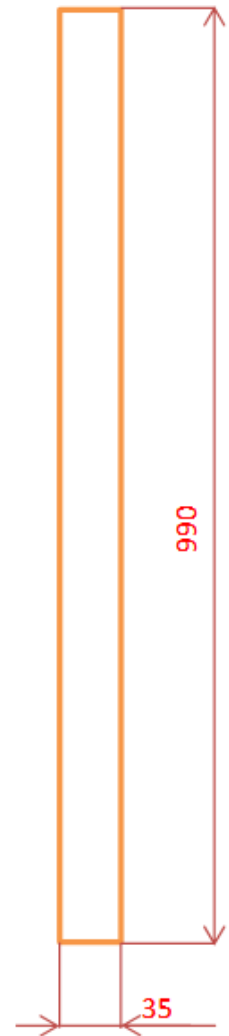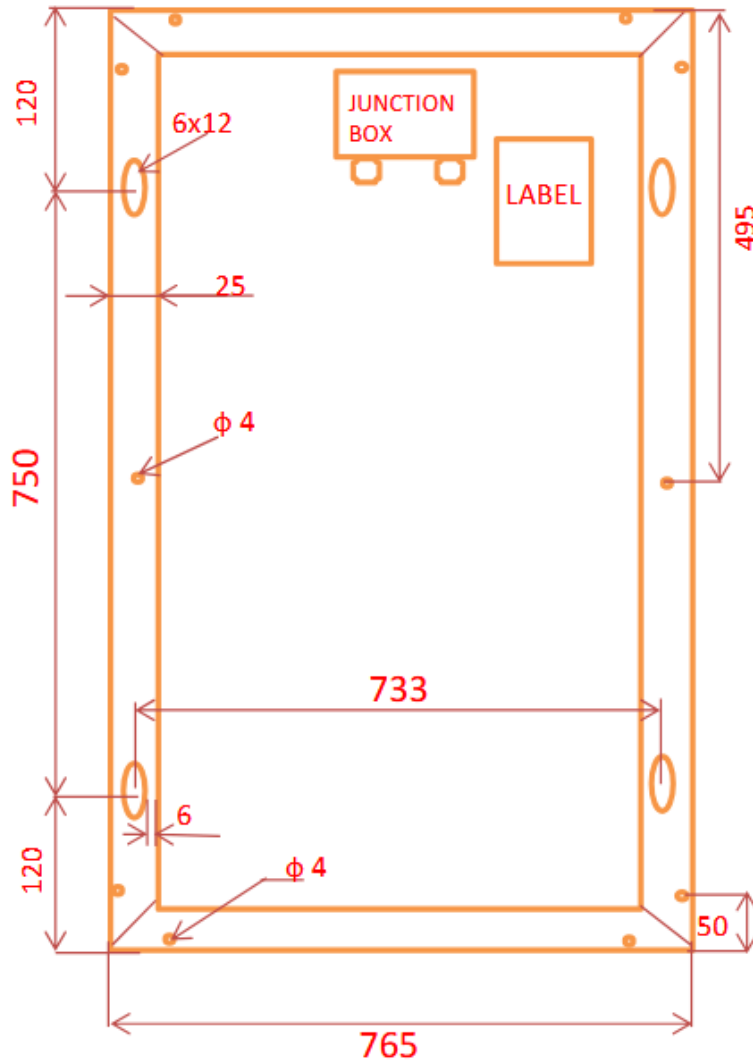

Note:- All Dimension in mm Unless otherwise specified, Tolerance +/- 2mm

Prepared By	Approved By
Chandrama	Bhavesh Patel