

	<u>Sun2earth solar</u>	Doc. No.	S2E/DGN/BOM/008
		Doc. Date:	01/01/2024
		Rev. No.	00
		Rev. Date:	
<u>CONSTRUCTIONAL DATA FORM FOR PHOTOVOTAIC MODULES 225 Watt</u>		Page 1 of 2	



Technical specifications of module

<u>Type Family</u>				
Pmax (W)	Voc (V)	Isc (A)	Vmp (V)	Imp (A)
250 (24V)	43.01	7.09	36.95	6.81
<u>Type Family</u>				
Pmax (W)	Voc (V)	Isc (A)	Vmp (V)	Imp (A)
250 (12V)	21.51	14.18	18.48	13.61

Type Of Series	TopCon Cut Cells 250W
Total Number of Cells:	60
Cell Matrix:	15 X 4
Max System Voltage (V):	600
Application Class:	A
Protection Calss:	II
Module Dimensions (mmXmmXmm):	1450X765X35
Module Area (sqm):	1.11
Module Efficiency (%):	>20
Current temperature coefficient α [%/°C]	+0.040
Voltage temperature coefficient β [%/°C]	-0.26
Power temperature coefficient δ [%/°C]	-0.34
NOCT [°C]	42 +/- 2

Prepared By	Approved By
Chandrama	Bhavesh Patel

CONSTRUCTIONAL DATA FORM FOR PHOTOVOTAIC MODULES 225 Watt

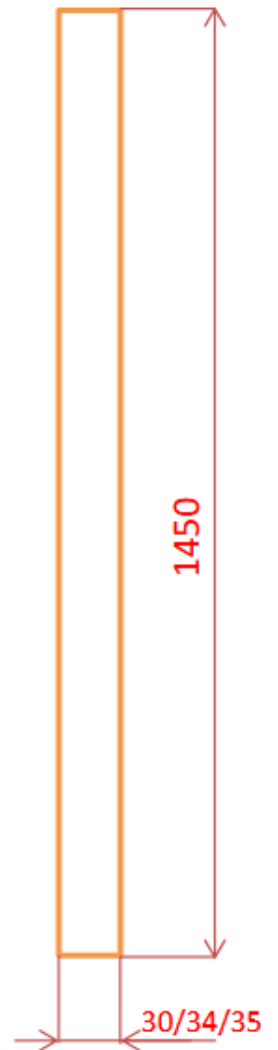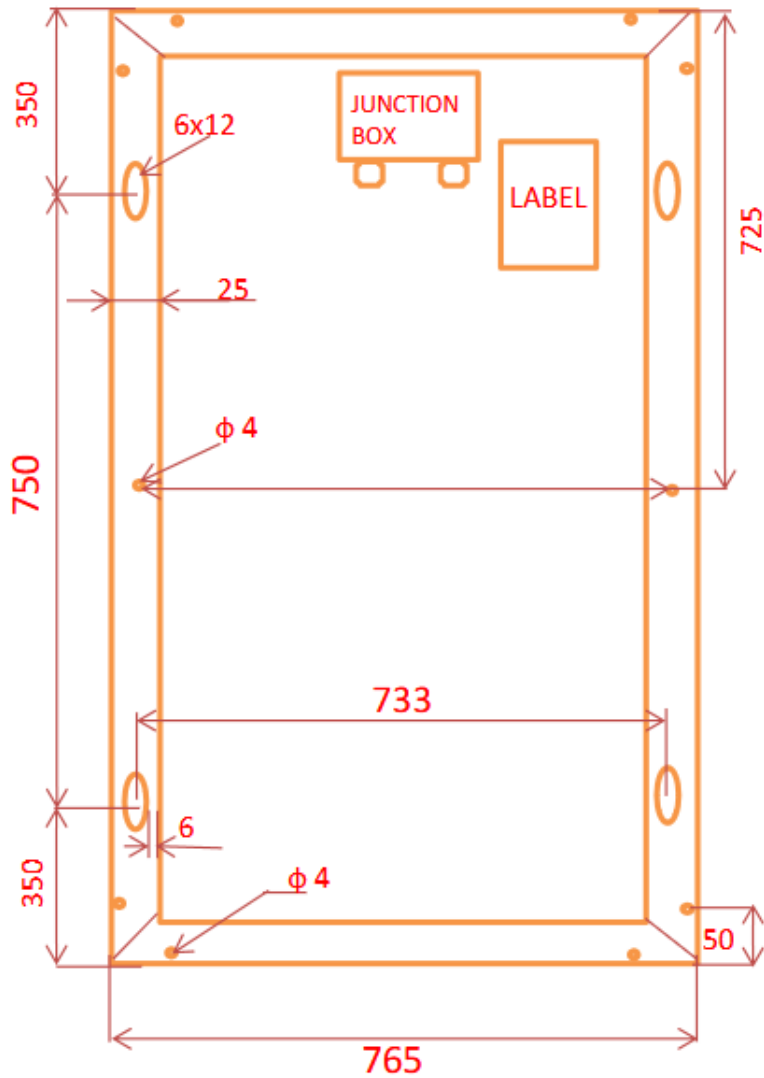

Note:- All Dimension in mm Unless otherwise specified, Tolerance +/- 2mm

Prepared By

Chandrama

Approved By

Bhavesh Patel